


WHR5H-WHR20H SERIES

2" Solids Handling Residential and Commercial Sewage and Effluent Pumps

SPECIFICATIONS

Applications	Domestic Wastewater and Septic Systems	
Capacities	218 GPM	825 LPM
Shut-off Head	70'	20.9 m
Solids Handling	2"	50.8 mm
Liquids Handling	raw sewage and sewage effluent	
Intermittent Liquid Temp.	up to 140°F	up to 60°C
Motor Electrical Data	1/2, 1, 1-1/2 & 2 HP, 3450 RPM, 208/230V, 1Ø, 60 Hz, PSC; 208/230/460V, 3Ø, 60Hz	
Acceptable pH Range	6-9	
Discharge, NPT	2"	50.8 mm
	3"	76.2 mm
Housing	cast iron	
Power Cord	20', 16/3, SJOW/SJOW-A, 1Ø 20', 16/4, SJOW/SJOW-A, 3Ø	
Impeller	ductile iron, vortex	
Volute Case	cast iron	
Shaft Seal	type 21, carbon & ceramic	
Minimum Sump Diameter		
Simplex:	24"	61 cm
Duplex:	30"	76 cm

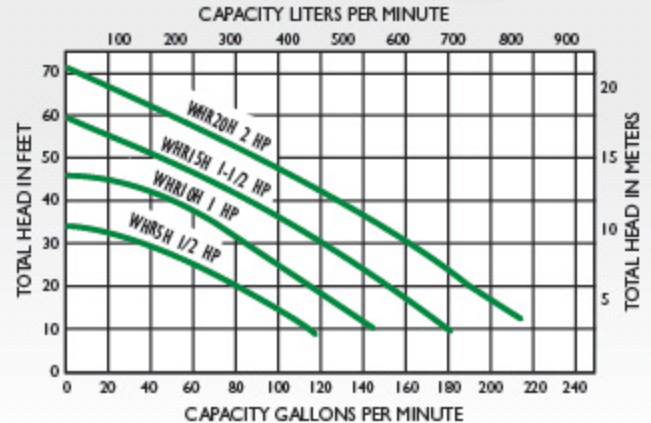

FEATURES

- Higher heads for demanding applications
- Domestic wastewater and septic systems
- Light commercial sewage
- High-capacity fluid transfer
- ETL Listed
- Durable motor for long-lasting performance
- 1/2, 1, 1-1/2 & 2 HP models
- Oil-filled for cooler operation and constant bearing lubrication
- Single-phase PSC motors eliminate starting switches
- Recessed impeller reduces radial loads and increases bearing life
- Thermal overload protection with automatic reset